



PATENT
Attorney Docket No. 223996
Client Reference No. GN 02096 OCONSOLAR

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Andriessen

Application No. 10/659,926

Filed: September 11, 2003

For: METAL CHALCOGENIDE COMPOSITE NANO-PARTICLES
AND LAYERS THEREWITH

Art Unit: Unassigned

Examiner: Unassigned

CLAIM OF PRIORITY

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Dear Sir:

In accordance with the provisions of 35 USC 119, Applicant claims the priority of the following application:

Application No. PCT/EP02/10268, filed in the European Patent
Office on September 12, 2002.

A certified copy of the above-listed priority document is enclosed.

Respectfully submitted,

Christopher T. Griffith, Reg. No. 33,392
LEYDIG, VOIT & MAYER, LTD.
Two Prudential Plaza, Suite 4900
180 North Stearns
Chicago, Illinois 60601-6780
Telephone: (312) 616-5600
Facsimile: (312) 616-5700

Date: October 1, 2003

CERTIFICATE OF MAILING

I hereby certify that this CLAIM OF PRIORITY (along with any documents referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Date: 10/1/03

Priority Claim (Revised 5/20/03)



Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.

The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den
The Hague,
La Haye, le

08. 09. 2003

Der Präsident des Europäischen Patentamts
Im Auftrag
For the President of the European Patent Office
Le Président de l'Office européen des brevets
p. o.

E. Speiser

Patentanmeldung Nr.
Patent application no. PCT/EP 02/10268
Demande de brevet n°

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation



Anmeldung Nr.:
Application no.: PCT/EP 02/10268
Demande n°:

Anmelder:
Applicant(s): 1. AGFA-GEVAERT - Mortsels, Belgium
D mandeur(s):

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention: METAL CHALCOGENIDE COMPOSITE NANO-PARTICLES AND LAYERS
THEREWITH

Anmeldetag:
Date of filing:
Date de dépôt: 12 September 2002 (12.09.2002)

In Anspruch genommene Priorität(en)
Priority(ies) claimed
Priorité(s) revendiquée(s)

Staat:	Tag:	Aktenzeichen:
State:	Date:	File no.
Pays:	Date:	Numéro de dépôt:

Benennung von Vertragsstaaten : Siehe Formblatt PCT/RO/101 (beigefügt)
Designation of contracting states : See Form PCT/RO/101 (enclosed)
Désignation d'états contractants : Voir Formulaire PCT/RO/101 (ci-joint)

Bemerkungen:
Remarks:
R marques:

PCT REQUEST

2/4

Original (for SUBMISSION) - printed on 11.09.2002 09:54:44 AM

GN02096

IV-1	Agent or common representative; or address for correspondence No agent or common representative is/has been appointed; the following special address should be used as:	address for correspondence
IV-1-1	Name	AGFA-GEVAERT
IV-1-2	Address:	Corporate IP Department 3800 Septestraat 27 B-2640 Mortsel Belgium
IV-1-3	Telephone No.	+32 3 444 38 06
IV-1-4	Facsimile No.	+32 3 444 74 98
IV-1-5	e-mail	Corporate-IP.BE.cb@Belgium.AGFA.com
V	Designation of States	
V-1	Regional Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AP: GH GM KE LS MW MZ SD SL SZ TZ UG ZM ZW and any other State which is a Contracting State of the Harare Protocol and of the PCT EA: AM AZ BY KG KZ MD RU TJ TM and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT EP: AT BE BG CH&LI CY CZ DE DK EE ES FI FR GB GR IE IT LU MC NL PT SE SK TR and any other State which is a Contracting State of the European Patent Convention and of the PCT OA: BF BJ CF CG CI CM GA GN GQ GW ML MR NE SN TD TG and any other State which is a member State of OAPI and a Contracting State of the PCT
V-2	National Patent (other kinds of protection or treatment, if any, are specified between parentheses after the designation(s) concerned)	AE AG AL AM AT AU AZ BA BB BG BR BY BZ CA CH&LI CN CO CR CU CZ DE DK DM DZ EC EE ES FI GB GD GE GH GM HR HU ID IL IN IS JP KE KG KP KR KZ LC LK LR LS LT LU LV MA MD MG MK MN MW MX MZ NO NZ OM PH PL PT RO RU SD SE SG SI SK SL TJ TM TN TR TT TZ UA UG UZ VC VN YU ZA ZM ZW

10/09/02 15:45

1

METAL CHALCOGENIDE COMPOSITE NANO-PARTICLES AND LAYERS THEREWITH

Field of the invention

5 The present invention relates to metal chalcogenide composite nano-particles, layers comprising same and photovoltaic devices comprising the layers.

Background of the invention.

10

A photovoltaic (PV) process basically consists of four steps: (1) absorption of a photon, (2) charge separation, (3) charge transport and (4) charge collection. Today crystalline silicon is the dominant PV-material on the market (ca 85%). Due to its high
15 price much research has been focussed on thin-film technologies which have low cost potential, the most of which are given in the table below together with the compounds used for each step of the above mentioned photovoltaic process.

	Light absorber	Charge separation (n/p-junction)	Charge transport P = p-type SC* N = n-type SC*	Charge collection C = cathode A = anode
Crystalline Si	Si	Si:P(n-type) / p-type Si	P = p-type Si N = Si:P	C: Al A: Metal grid
Thin film Si	Si	Si:P(n-type) / p-type Si	P = p-type Si N = Si:P	C: Al A: ITO, ZnO:Al, SnO ₂ :F
Amorphous Si	Si	Si:P(n-type) / intrinsic Si / p-type Si	P = p-type Si N = Si:P	C: Al A: ITO, ZnO:Al, SnO ₂ :F
Cu(In,Ga)(Se,S) ₂	Cu(In,Ga)(Se,S) ₂	CuIn(Se,S) ₂ or CdS/CuGa(Se,S) ₂	N: CuIn(Se,S) ₂ or CdS P: CuGa(Se,S) ₂	C: Mo A: ITO, ZnO:Al, SnO ₂ :F
CdTe	CdS (& CdTe)	CdS/CdTe	N: CdS P: CdTe	C: Al, Cu A: ITO, ZnO:Al, SnO ₂ :F
Dye sensitized	Ru-dye, Organic dye	TiO ₂ /dye	N: TiO ₂ P: I ⁻ I ₃ ⁻ , Spiro-OMeTAD, CuI	C: Al, ITO, ZnO:Al, SnO ₂ :F A: ITO, ZnO:Al, SnO ₂ :F
Organic	(MEH) PPV	C ₆₀ / (MEH) PPV	N: C ₆₀ P: (MEH) PPV	C: Al A: ITO

20 * SC = semiconductor

Although all the above mentioned concepts are categorized as thin film photovoltaic devices, only the pure organic technology uses really thin films for the photoactive layer (< 200 nm). The other technologies use film thicknesses of the photoactive layer between 1 and 20-30 μm . Such thick films require high temperature manufacturing steps to realize sufficient charge mobilities in the respective n- and p-type semiconducting charge transporting materials. Otherwise, no charges could be collected at the electrodes. Although charge mobilities are low in organic photovoltaic technology, charges can be successfully collected due to the very thin photoactive layer (< 200 nm).

Although energy conversion efficiencies of 2.5% and 2.9% were reported in 2001 by Shaheen et al. in Applied Physics Letters, volume 78, pages 841-843; and by Munters et al. in the Proceedings of E-MRS Spring meeting, the main drawback for organic photovoltaic devices remains the stability of the device.

Since the beginning of the 80's, much research effort has been devoted to so-called quantum dots or inorganic nano-particles. Several photovoltaic devices had been reported before Huyn et al. disclosed a energy conversion efficiency of 1.7% in Science, volume 295, pages 2425-2427, using a blend of nano-rods of CdSe (as light absorber and n-type semiconducting material) and poly-3(hexylthiophene) (as light absorber and p-type semiconducting material). Although the photovoltaic blend can be applied in a single coating step, resulting in a layer thickness of 110 nm, the blend still contains an organic semiconducting material, and hence stability could still be a problem.

The so-called dye sensitized solar cell reported in 1991 by Graetzel in Nature, volume 353, pages 737-740, and disclosed in US 4,927,721, US 5,350,644 and JP-A 05-504023, is also a type of bulk heterojunction photovoltaic cell in which TiO_2 nano-particles are used as the n-type semi-conductor. However, the construction of these devices is far more complicated than a one-step coating of a photovoltaic layer.

A need therefore exists for novel thin film photovoltaic materials.

GB 1119372 discloses a photovoltaic device based on Cu_2S -powder which is pressed at 700-1000°C and 100-1000 kg/cm^2 to form a plate 2.0 cm^2 in area and 3.0 mm thick. A CdS plate is prepared by pressing CdS powder into pellets, sintering at 800 °C in a nitrogen atmosphere, and grinding to a powder. The product is then pressed

as above to form a plate 0.75 cm^2 in area and 0.35 mm thick. After etching and polishing the surfaces, both disks were placed in an alloy die, enveloped in powder graphite, and pressed at 400°C and 200 kg/cm^2 . This photovoltaic device can be described as a two-dimensional p-n heterojunction device. ZnSe or ZnS could be also used instead of CdS, but with reduced light absorption due to the larger bandgaps.

In 2002 Reijnen et al. in Biomimetic and Supramolecular Systems, volume C19(1-2), pages 311-314, reported the feasibility of a photovoltaic device with TiO_2 as n-type semiconductor and vacuum deposited $\text{Cu}_{1.8}\text{S}$ as a p-type semiconductor and absorber.

In 1968, Vlasko et al. reported in Phys. Stat. Sol., volume 26, pages K77-80, investigated the possible role of p-n heterojunction formation in Cu_xS and ZnS evaporated layer structures exhibiting electroluminescence.

Coprecipitation of copper sulphide and zinc sulphide was reported in 1932 by Kolthoff et al. in Journal of Physical Chemistry, volume 36, pages 549-566. In 1998, Tsamouras et al. in Langmuir, volume 14, pages 5298-5304, described the preparation and characterization of mixed Cu(II), Zn(II) sulphides which they described by the stoichiometric formula $\text{Cu}_x\text{Zn}_{1-x}\text{S}$ obtained by spontaneous precipitation in electrolyte solutions upon mixing copper and zinc nitrate solutions with an ammonium sulphide solution at a pH of 2.5 with small quantities of hydrazine sulphate being added to accelerate sulphide precipitation. XRD-spectra showed reflections of both ZnS and CuS, the precipitates mainly consisting of the two sulphides together with nonstoichiometric sulphides of Cu(II) and Zn(II) . The spherulitic particles obtained upon increasing zinc content had a mean particle size of 0.5 to $1 \mu\text{m}$. The precipitated copper(II) sulphide exhibited metallic conductor behaviour over the temperature range investigated. The precipitates behaved as n-type semiconductors. No photovoltaic evaluations were reported.

In 1999, Tsamouras et al. in Langmuir, volume 15, pages 7940-7946, reported the properties of a series of $\text{Cu}_x\text{Ni}_{1-x}\text{S}$ powders prepared by spontaneous coprecipitation in aqueous solutions by rapidly mixing copper(II) and nickel(II) chloride solutions with a ammonium sulphide solution at a pH of 2.5 with hydrazine sulphate being finally added at a concentration equal to the final sulphide concentration in the solution to accelerate sulphide formation. Powder XRD spectra included new peaks which could not be attributed to copper(II) sulphide, nickel(II) sulphide or other known species

suggesting the formation of new intermediate phases. The powders exhibited broad particle size distributions with mean particle sizes of 5 to 11 μm . Current potential curves in electrochemical cells with $\text{Cu}_x\text{Ni}_{1-x}\text{S}/\text{Au}$ and Pt electrodes with 0.01 M $\text{Ce}^{3+}/\text{Ce}^{4+}$ as electrolyte under constant tungsten-halide lamp illumination (100 mW/cm^2) gave values for the open circuit potential as high as 0.868 V with 0.119 mA for the photocurrent and 0.58 for the field factor.

EP-A 1 231 250 discloses a method for manufacturing a thin film inorganic light emitting diode device, said method comprising following steps: (1) preparing a nano-particle dispersion comprising together ZnS doped with a luminescence centre (n-type semiconductor) and Cu_xS (p-type semiconductor) by precipitation from appropriate aqueous solutions of the respective ions, or, (1') preparing a first separate nano-particle dispersion of ZnS doped with a luminescent centre (n-type semiconductor) and a second separate nano-particle dispersion of Cu_xS (p-type semiconductor), both by precipitation from appropriate aqueous solutions of the respective ions, (2) washing the dispersion prepared according to (1) or both dispersions according to (1') to remove non-precipitated ions, (3) coating onto a first conductive electrode the dispersion resulting from steps (1) and (2), or a mixture of the dispersions resulting from steps (1') and (2) in one and the same layer, or the separate dispersions resulting from steps (1') and (2) in two separate layers, (4) applying on top of said coated layer(s) resulting from step (3) a second conductive electrode, with the proviso that at least one of said first and second electrodes is transparent.

Aspects of the invention.

It is therefore an aspect of the present invention to provide novel thin film photovoltaic materials.

It is another aspect of the present invention to provide a process for preparing novel thin film photovoltaic materials.

Further aspects and advantages of the invention will become apparent from the description hereinafter.

Summary of the invention.

Were n-type and p-type semiconducting materials to be used to construct a bulk heterojunction photovoltaic device with a layer thickness of 50-200 nm, nano-sized particles would be necessary.

However, low bandgap semi-conductors would be necessary to obtain the necessary absorption, but these behave more or less as conductors, which is undesirable in photovoltaic cells. Despite this drawback, it has been surprisingly found that metal
5 chalcogenide composite nano-particles with a n-type semiconducting metal chalcogenide phase and a p-type semiconducting metal chalcogenide phase, which at concentrations of the p-type semiconducting phase of 1 or 2 mole% exhibit electroluminescence, exhibit a photovoltaic effect at p-type semiconducting phases of 5
10 to 50 mole %. This effect can be increased by incorporating a binder and a spectral sensitizer such as a metal chalcogenide spectral sensitizer either by admixture or by incorporation in the metal chalcogenide composite nano-particle itself.

Aspects of the present invention are realized by a metal
15 chalcogenide composite nano-particle comprising a metal capable of forming p-type semiconducting chalcogenide nano-particles and a metal capable of forming n-type semiconducting chalcogenide nano-particles, wherein at least one of the metal chalcogenides has a band-gap between 1.0 and 2.9 eV and the concentration of the metal
20 capable of forming p-type semiconducting chalcogenide nano-particles is at least 5 atomic percent of the metal and is less than 50 atomic percent of the metal.

Aspects of the present invention are also realized by a dispersion comprising the above-mentioned metal chalcogenide
25 composite nano-particle.

Aspects of the present invention are also realized by a process for preparing the above-mentioned dispersion comprising the steps of preparing a composite metal chalcogenide nano-particle containing an n-type semiconducting chalcogenide and a p-type
30 semiconducting p-type semiconducting chalcogenide, wherein at least one of the metal chalcogenides has a band-gap between 1.5 and 2.9 eV.

Aspects of the present invention are also realized by a layer comprising the above-mentioned metal chalcogenide composite nano-
35 particles.

Aspects of the present invention are also realized by a photovoltaic device comprising the above-mentioned layer.

Aspects of the present invention are also provided by the use of the above-mentioned metal chalcogenide composite nano-particle
40 in a photovoltaic device.

Preferred embodiments are disclosed in the dependent claims.

Detailed description of the invention.

Figure 1 represents the dependences of transmission, T, in % upon wavelength, λ , in nm for ca. 100 nm thick layers prepared with coating dispersions F, G, H, I, J, K and L (see the INVENTION EXAMPLES for the compositions of these coating dispersions).

Definitions

10 The term metal chalcogenide composite nano-particle refers to the primary particle formed in the preparation process and not to agglomerates thereof.

The term metal chalcogenide means a binary compound containing a chalcogen and a more electropositive element or radical. A
15 chalcogen is an element from group IV of the periodic table including oxygen, sulphur, selenium, tellurium and polonium.

The term nano-particle for the purposes of the present invention means a number mean particle size of less than 50 nm.

The term "support" means a "self-supporting material" so as to
20 distinguish it from a "layer" which may be coated on a support, but which is itself not self-supporting. It also includes any treatment necessary for, or layer applied to aid, adhesion to the support.

The term continuous layer refers to a layer in a single plane covering the whole area of the support and not necessarily in
25 direct contact with the support.

The term non-continuous layer refers to a layer in a single plane not covering the whole area of the support and not necessarily in direct contact with the support.

The term coating is used as a generic term including all means
30 of applying a layer including all techniques for producing continuous layers, such as curtain coating, doctor-blade coating etc., and all techniques for producing non-continuous layers such as screen printing, ink jet printing, flexographic printing, and techniques for producing continuous layers.

35

Metal chalcogenide composite nano-particles

Aspects of the present invention are realized with a metal chalcogenide composite nano-particle comprising a metal capable of
40 forming p-type semiconducting chalcogenide nano-particles and a metal capable of forming n-type semiconducting chalcogenide nano-particles, wherein at least one of the metal chalcogenides has a

band-gap between 1.5 and 2.9 eV and the concentration of the metal capable of forming p-type semiconducting chalcogenide nano-particles is at least 5 atomic percent of the metal and is less than 50 atomic percent of the metal.

5 According to a first embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite particle comprises a p-type semiconducting metal chalcogenide phase and a n-type semiconducting chalcogenide phase, at least one of the metal chalcogenides has a
10 band-gap between 1.0 and 2.9 eV and the concentration of the p-type semiconducting metal chalcogenide in the metal chalcogenide composite nano-particle is at least 5 mole percent and is less than 50 mole percent.

According to a second embodiment of the metal chalcogenide
15 composite nano-particle, according to the present invention, the metal chalcogenide composite particle is a coprecipitated particle, being a particle prepared by a coprecipitation technique.

According to a third embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the
20 metal chalcogenide composite particle is a metal sulphide composite particle.

According to a fourth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal capable of forming n-type semiconducting chalcogenide nano-
25 particles is selected from the group consisting of zinc, bismuth, cadmium, mercury, indium, tin, tantalum and titanium.

According to a fifth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal capable of forming p-type semiconducting chalcogenide nano-
30 particles is selected from the group consisting of copper, chromium, iron, lead and nickel.

According to a sixth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite particle further contains a metal
35 capable of forming spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV.

According to a seventh embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite particle further contains a metal
40 capable of forming spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV which is selected

from the group consisting of silver, lead, copper, bismuth, vanadium and cadmium.

According to an eighth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the
5 metal chalcogenide composite nano-particle is a coprecipitated metal sulphide composite nano-particle containing zinc and copper.

According to a ninth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite nano-particle is a coprecipitated
10 metal sulphide composite nano-particle containing zinc, copper and silver.

According to a tenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite nano-particle is a coprecipitated
15 metal sulphide composite nano-particle containing zinc, copper and silver, wherein the metal is between 40 and 80 atomic percent zinc.

According to an eleventh embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite nano-particle is a coprecipitated
20 metal sulphide composite nano-particle containing zinc, copper and silver, wherein the metal is between 5 and 25 atomic percent silver.

According to a twelfth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the
25 metal chalcogenide composite nano-particle is a coprecipitated metal sulphide composite nano-particle containing zinc, copper and silver, wherein the metal is between 15 and 50 atomic percent copper.

The stoichiometry of the metal chalcogenide composite nano-
30 particle, according to the present invention, may be stoichiometric, may have a deficit in chalcogenide or may have a deficit in metal. Photoluminescence, which reduces any photovoltaic effect observed, is known to be quenched by a zinc deficiency in the case of zinc sulphide.

35 According to a thirteenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, a stoichiometric deficit of the chalcogenide in the metal chalcogenide composite nano-particle is present in the nano-particle.

40 According to a fourteenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, a

stoichiometric deficit of the chalcogenide between 1 and 30 atomic percent is present in the nano-particle.

According to a fifteenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, a
5 stoichiometric deficit of the chalcogenide between 1.5 and 25 atomic percent is present in the nano-particle.

According to a sixteenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, a stoichiometric deficit of the metal is present in the nano-
10 particle.

X-ray diffraction spectra carried out on the metal chalcogenide composite nano-particles, according to the present invention, were found to be substantially amorphous, although it was possible to determine the particle size from the peak-width of
15 the X-ray diffraction peaks using the Debye-Scherrer equation, values of 1.5 to 5 nm depending upon the precipitation conditions being obtained. The maximum crystallinity was estimated to be 10% and the primary particle size was estimated from the peak width to be substantially less than 10nm.

20 According to a seventeenth embodiment of the metal chalcogenide composite nano-particle, according to the present invention, the metal chalcogenide composite nano-particle has a crystallinity of 10 percent or less.

Typically particle size distribution measurements carried out
25 with the Disc Centrifuge Photosedimentometer BI-DCP from Brookhaven yielded a weight average diameter of about 75 nm, which decreased after ultrasonic treatment indicating that agglomerates were present and could be at least partially deagglomerated by ultrasonic treatment.

30 The metal chalcogenide composite nano-particle comprising at least two metals, according to the present invention, can be prepared by coprecipitation, conversion with metal ions, encapsulation, co-chemical vapour deposition or simple mixing followed by a coagulation step such as heat and/or pressure
35 sintering. It is believed that the n-type semiconducting and p-type semiconducting phases form an n-p heterojunction and that this heterojunction provides for charge separation. Spectrophotometric measurements carried out on layers of the metal chalcogenide composite nano-particles, according to the present invention,
40 showed transmissions between 55 and 85% in the visible region of the spectrum which is only weakly dependent upon wavelength (see Figure 1).

Process for preparing a dispersion of a metal chalcogenide
composite nano-particle

5 Aspects of the present invention are realized by a process for preparing a dispersion, according to the present invention, comprising the steps of preparing a composite metal chalcogenide nano-particle containing an n-type semiconducting chalcogenide and a p-type semiconducting p-type semiconducting chalcogenide, wherein
10 at least one of the metal chalcogenides has a band-gap between 1.0 and 2.9 eV.

According to a first embodiment of the process, according to the present invention, the process includes a coprecipitation step, a metal ion conversion step and/or a sintering step. The sintering
15 step may require the application of heat or pressure alone or the combined application of heating and pressure.

According to a second embodiment of the process, according to the present invention, the process includes a coprecipitation step carried out in a medium containing at least one compound selected
20 from the group of thiols, triazole compounds and diazole compounds. Thiols, such as 1-thioglycerol (3-mercapto-1,2-propanediol), triazole compounds and diazole compounds prevent agglomeration of the metal chalcogenide composite nano-particles.

According to a third embodiment of the process, according to
25 the present invention, the process includes the step of mixing the metal chalcogenide composite nano-particles with spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV.

According to a fourth embodiment of the process, according to
30 the present invention, the process includes the step of mixing the metal chalcogenide composite nano-particles with spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.5 and 2.8 eV.

According to a fifth embodiment of the process, according to
35 the present invention, the process includes the step of mixing the metal chalcogenide composite nano-particles with spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.7 and 2.7 eV.

According to a sixth embodiment of the process, according to
40 the present invention, the process further comprises the step of converting the metal chalcogenide composite nano-particles with metal ions.

According to a seventh embodiment of the process, according to the present invention, the process further includes a diafiltration step.

The metal chalcogenide composite nano-particles, according to the present invention, are prepared using solutions of salts of the respective ions, the metal chalcogenide composite nano-particles produced are preferably washed, diafiltered and then concentrated. The washing media may also contain ingredients such as phosphoric acid, phosphates or thiols, such as 1-thioglycerol, to stabilize or otherwise improve the properties of the metal chalcogenide composite nano-particles.

According to an eighth embodiment of the process, according to the present invention, the process comprises a double jet coprecipitation step. In double jet coprecipitation a first and a second aqueous solution are added simultaneously to a third solution under controlled conditions of temperature and flow rate.

Layer

Aspects of the present invention are also realized by a layer comprising the metal chalcogenide composite nano-particles according to the present invention.

According to a first embodiment of the layer, according to the present invention, the layer has a thickness of less than 500 nm.

According to a second embodiment of the layer, according to the present invention, the layer has a thickness of less than 200 nm.

According to a third embodiment of the layer, according to the present invention, the layer has a thickness of greater than 20 nm.

Spectrally sensitizers

According to a fourth embodiment of the layer, according to the present invention, the layer further contains at least one spectral sensitizer for the metal chalcogenide composite nano-particles.

According to a fifth embodiment of the layer, according to the present invention, the layer further contains at least one spectral sensitizer for the metal chalcogenide composite nano-particles selected from the group consisting of metal chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV, organic dyes, and metallo-organic dyes.

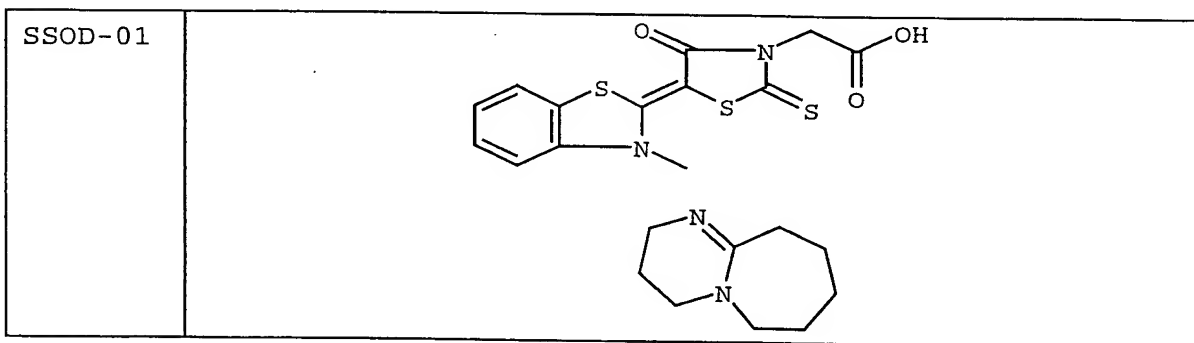
According to a sixth embodiment of the layer, according to the present invention, the layer further contains at least one spectral sensitizer for the metal chalcogenide composite nano-particles selected from the group consisting of metal chalcogenide nano-
5 particles with a band-gap between 1.5 and 2.8 eV, organic dyes, and metallo-organic dyes.

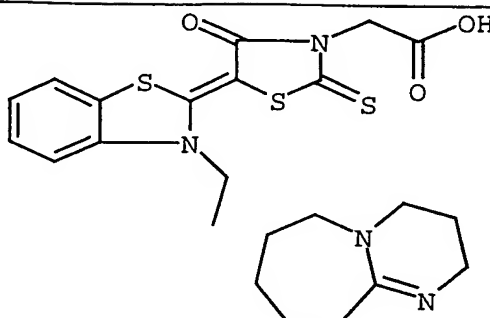
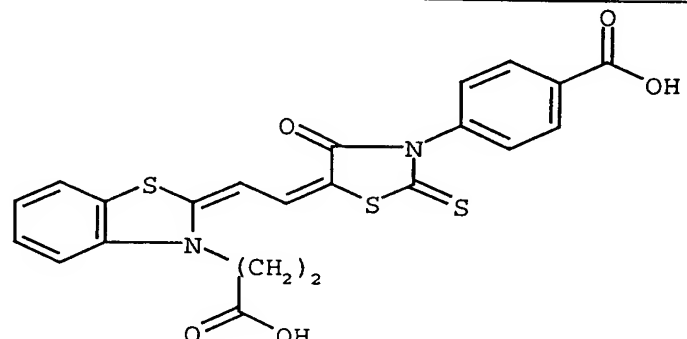
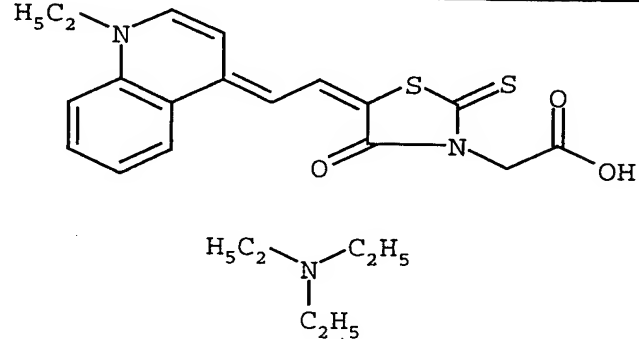
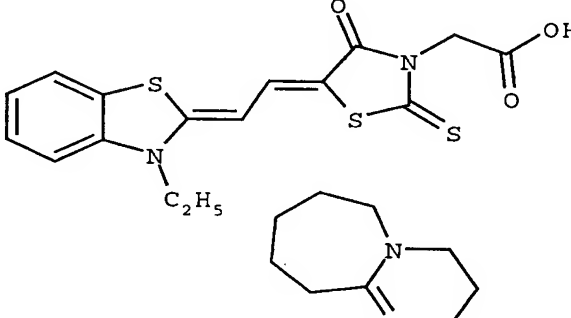
According to a seventh embodiment of the layer, according to the present invention, the layer further contains at least one spectral sensitizer for the metal chalcogenide composite nano-
10 particles selected from the group consisting of metal chalcogenide nano-particles with a band-gap between 1.7 and 2.7 eV, organic dyes, and metallo-organic dyes.

According to an eighth embodiment of the layer, according to the present invention, the layer further contains at least one
15 spectral sensitizer for the metal chalcogenide composite nano-particles selected from the group consisting of metal oxides, metal sulphides and metal selenides.

According to a ninth embodiment of the layer, according to the present invention, the layer further contains at least one spectral
20 sensitizer for the metal chalcogenide composite nano-particles selected from the group consisting of lead sulphide, bismuth sulphide, cadmium sulphide, silver sulphide, antimony sulphide, indium sulphide, copper sulphide, cadmium selenide, copper selenide, indium selenide and cadmium telluride.

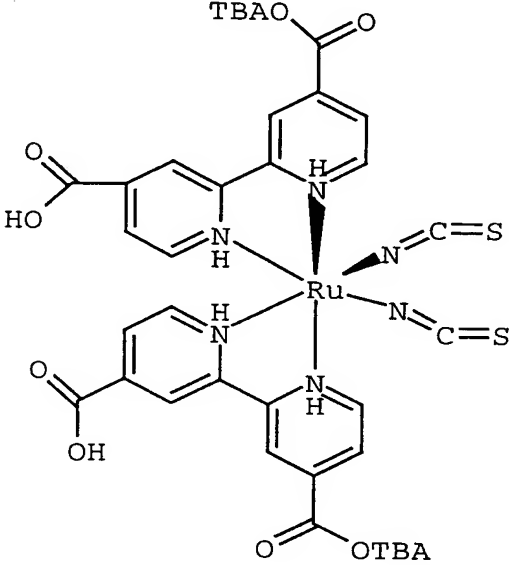
25 Suitable spectrally sensitizing organic dyes (SSOD) include cyanine, merocyanine and anionic dyes, such as:



SSOD-02	
SSOD-03	
SSOD-04	
SSOD-05	

Suitable spectrally sensitizing metallo-organic dyes allowing for broad absorption of the solar spectrum include:

	chemical name
Ruthenium 470, a ruthenium dye from Solaronix	tris(2,2'-bipyridyl-4,4' dicarboxylato) ruthenium (II) dichloride

Ruthenium 505, a ruthenium dye from Solaronix	cis-bis(isocyanato) (2,2'-bipyridyl-4,4'-dicarboxylato) ruthenium (II)
Ruthenium 535 (previously known as SRS-HQ, N3), a ruthenium dye from Solaronix	cis-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II)
Ruthenium 535 bis-TBA (previously known as MRS-HQ, N719, dye salt) a ruthenium dye from Solaronix	<p>cis-bis(isothiocyanato)bis(2,2'-bipyridyl-4,4'-dicarboxylato)-ruthenium(II) bis-tetrabutylammonium</p> 
Ruthenium 620 "Black Dye", a ruthenium dye from Solaronix	(anion only) tris(isothiocyanato)-ruthenium(II)-2,2':6',2"-terpyridine-4,4',4"-tricarboxylic acid

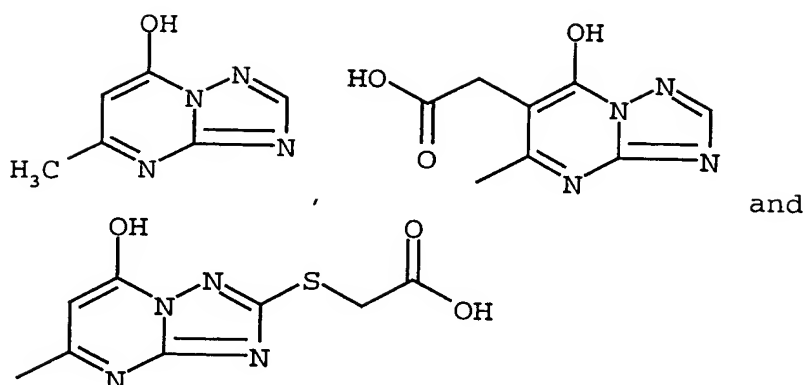
Triazole or diazole compound

According to a preferred embodiment of the process, according to the present invention, the process further comprises a precipitation step carried out in a medium containing at least one of a triazole compound and a diazole compound.

According to a ninth embodiment of the process, according to the present invention, the process further comprises a precipitation step carried out in a medium containing a tetraazaindene, a triazole compound.

According to a tenth embodiment of the process, according to the present invention, the process further comprises a precipitation step carried out in a medium containing a triazole compound selected from the group consisting of

15



Suitable triazole or diazole compounds, according to the present invention, include:

T1		5-methyl-1,2,4-triazolo-(1,5-a)-pyrimidine-7-ol
T2		
T3		
D1		

Phosphoric acid or phosphate

According to an eleventh embodiment of the process, according to the present invention, the process further includes a diafiltration process in which the washing medium in the diafiltration process contains a phosphoric acid or a phosphoric acid salt.

According to a twelfth embodiment of the process, according to the present invention, the process further includes a diafiltration process in which the washing medium in the diafiltration process contains a phosphoric acid selected from the group consisting of, 5 orthophosphoric acid, phosphorous acid, hypophosphorous acid and polyphosphoric acids.

Polyphosphoric acids include diphosphoric acid, pyrophosphoric acid, triphosphoric acid, tetraphosphoric acid, metaphosphoric acid and "polyphosphoric acid".

10 According to a thirteenth embodiment of the nano-porous metal oxide, according to the present invention, the phosphate is selected from the group consisting of orthophosphates, phosphates, phosphites, hypophosphites and polyphosphates.

Polyphosphates are linear polyphosphates, cyclic 15 polyphosphates or mixtures thereof. Linear polyphosphates contain 2 to 15 phosphorus atoms and include pyrophosphates, dipolyphosphates, tripolyphosphates and tetrapolyphosphates. Cyclic polyphosphates contain 3 to 8 phosphorus atoms and include trimetaphosphates and tetrametaphosphates and metaphosphates.

20 Polyphosphoric acid may be prepared by heating H_3PO_4 with sufficient P_4O_{10} (phosphoric anhydride) or by heating H_3PO_4 to remove water. A $\text{P}_4\text{O}_{10}/\text{H}_2\text{O}$ mixture containing 72.74% P_4O_{10} corresponds to pure H_3PO_4 , but the usual commercial grades of the acid contain more water. As the P_4O_{10} content $\text{H}_4\text{P}_2\text{O}_7$, 25 pyrophosphoric acid, forms along with P_3 through P_8 polyphosphoric acids. Triphosphoric acid appears at 71.7% P_2O_5 ($\text{H}_5\text{P}_3\text{O}_{10}$) and tetraphosphoric acid ($\text{H}_6\text{P}_4\text{O}_{13}$) at about 75.5% P_2O_5 . Such linear polyphosphoric acids have 2 to 15 phosphorus atoms, which each bear a strongly acidic OH group. In addition, the two terminal P atoms 30 are each bonded to a weakly acidic OH group. Cyclic polyphosphoric acids or metaphosphoric acids, $\text{H}_n\text{P}_n\text{O}_{3n}$, which are formed from low-molecular polyphosphoric acids by ring closure, have a comparatively small number of ring atoms ($n=3-8$). Each atom in the ring is bound to one strongly acidic OH group. High linear and 35 cyclic polyphosphoric acids are present only at acid concentrations above 82% P_2O_5 . Commercial phosphoric acid has a 82 to 85% by weight P_2O_5 content. It consists of about 55% tripolyphosphoric acid, the remainder being H_3PO_4 and other polyphosphoric acids.

A polyphosphoric acid suitable for use according to the 40 present invention is a 84% (as P_2O_5) polyphosphoric acid supplied by ACROS (Cat. No. 19695-0025).

Binder

According to a tenth embodiment of the layer, according to the present invention, the layer further contains a binder.

5 According to an eleventh embodiment of the layer, according to the present invention, the layer further contains polyvinylpyrrolidone).

Adding a binder to the dispersion improves the layer quality and photovoltaic properties of layers, according to the present
10 invention, and up to a weight ratio of 10% binder to metal chalcogenide composite nano-particles. Too much binder, e.g. a weight ratio of 50% binder to metal chalcogenide composite nano-particles, adversely affects the photovoltaic properties. This is probably due to adversely affecting the percolation threshold of
15 the n- and p-type semi-conducting particles thereby reducing the short circuit current.

Suitable binders include: polyvinylpyrrolidone); cellulose and cellulose derivatives, such as carboxymethylcellulose, hydroxypropylcellulose, hydroxyethylcellulose, methyl cellulose,
20 ethyl cellulose, quaternary ammonium cellulose derivatives (e.g. Celquat™); polyacrylic acid, polymethacrylic acid, poly(styrenesulphonic acid); polyallylamine; copolymers of methylvinylether and maleic anhydride; gelatine and polyvinylalcohol.

25

Support

Supports for use according to the present invention include polymeric films, silicon, ceramics, oxides, glass, polymeric film
30 reinforced glass, glass/plastic laminates, metal/plastic laminates, paper and laminated paper, optionally treated, provided with a subbing layer or other adhesion promoting means to aid adhesion to the layer configuration, according to the present invention. Suitable polymeric films are poly(ethylene terephthalate),
35 poly(ethylene naphthalate), polystyrene, polyethersulphone, polycarbonate, polyacrylate, polyamide, polyimides, cellulose triacetate, polyolefins and poly(vinylchloride), optionally treated by corona discharge or glow discharge or provided with a subbing layer.

40

Photovoltaic devices

Aspects of the present invention are also realized by a photovoltaic device comprising a layer according to the present
5 invention.

According to a first embodiment of the photovoltaic device, according to the present invention, the photovoltaic device comprises two electrodes at least one of which is transparent. Suitable transparent electrodes are inorganic transparent
10 electrodes, such as indium tin oxide, $\text{SnO}_2\text{:F}$, tin antimony oxide, zinc oxide, vanadium pentoxide and copper iodide, and organic transparent electrodes, such as polyaniline, poly(3,4-ethylenedioxythiophene) etc.

Photovoltaic devices comprising a layer, according to the
15 present invention, can be of two types: the regenerative type which converts light into electrical power leaving no net chemical change behind in which current-carrying electrons are transported to the anode and the external circuit and the holes are transported to the cathode where they are oxidized by the electrons from the external
20 circuit and the photosynthetic type in which there are two redox systems one reacting with the holes at the surface of the semiconductor electrode and one reacting with the electrons entering the counter-electrode, for example, water is oxidized to oxygen at the semiconductor photoanode and reduced to hydrogen at
25 the cathode. The charge transporting process can be ionic or electronic.

Such regenerative photovoltaic devices can have a variety of internal structures in conformity with the end use. Conceivable forms are roughly divided into two types: structures which receive
30 light from both sides and those which receive light from one side. An example of the former is a structure made up of a transparently conductive layer e.g. an ITO-layer or a PEDOT/PSS-containing layer and a transparent counter electrode electrically conductive layer e.g. an ITO-layer or a PEDOT/PSS-containing layer having interposed
35 therebetween a photosensitive layer and a charge transporting layer. Such devices preferably have their sides sealed with a polymer, an adhesive etc. to prevent deterioration or volatilization of the inside substances. The external circuit connected to the electrically-conductive substrate and the counter
40 electrode via the respective leads is well-known.

Industrial application

Layers, according to the present invention, can be used in both regenerative and photosynthetic photovoltaic devices.

5

The invention is illustrated hereinafter by way of EXAMPLES and photovoltaic devices. The percentages and ratios given in these examples are by weight unless otherwise indicated.

10

EXAMPLES

Preparation of a ZnS nano-particle dispersion

The following solutions were prepared:

15

Solution 1:	ZnCl ₂ .2H ₂ O deionized water	81.76 g (0.47 moles) made up to 600 mL
Solution 2:	Na ₂ S.9H ₂ O NH ₃ (50%) deionized water	140.22 g (0.57 moles) 4.5 mL made up to 600 mL

Dispersion 1:

The ZnS dispersion 20% substoichiometric in zinc was prepared as follows: first solutions 1 and 2 were added simultaneously at 25°C at a flow rate of 500 mL/min to 1000 mL of deionized water maintained at 25°C and stirred at 1500 rpm. To 1000 mL of the resulting dispersion, 1000 mL of a 5% thioglycerol solution in water were added and the dispersion concentrated to 1000 mL by means of a Fresenius F60 cartridge. This dispersion was subsequently diafiltered by using 5000 mL of a 5% solution of thioglycerol in water. This dispersion was then further diafiltered using 2000 mL of deionized water. The dispersion was further concentrated to a volume of about 570 mL (0.382M in ZnS_x). A concentration of 25 g/L of Zn was determined by ICP. Absorption measurements showed a bandgap of around 295 nm, indicating particle sizes below 4 nm, according to the Brus's equation [L. E. Brus, J. Chem. Phys. 80(9), 4403-4409 (1984)].

35

Preparation of a CuS_x nano-particle dispersion

The following solutions were prepared:

Solution 3:	CuCl ₂ .2H ₂ O deionized water	37.5 g (0.22 moles) made up to 600 mL
Solution 4:	Na ₂ S.9H ₂ O NaOH (50%) deionized water	51.88 g (0.21 moles) 1.7 mL made up to 600 mL
Solution 5:	1-thioglycerol deionized water	50 mL made up to 750 mL

Dispersion 2:

5 The Cu_xS dispersion 4.5% substoichiometric in sulphur was prepared as follows: solutions 3 and 4 were added simultaneously at 25°C and a flow rate of 500 mL/min to solution 5 maintained at 25°C and stirred at 1500 rpm. 1000 mL of the resulting dispersion was diafiltered using 5000 mL of a 5% solution of thioglycerol in
10 water. This dispersion was then further diafiltered using 2000 mL of deionized water. Finally the dispersion was further concentrated to a volume of about 200 mL. A concentration of 25 g/L (0.393M) of Cu was determined by ICP. Absorption measurements showed a bandgap of around 520 nm, indicating nano sized particles according to
15 quantum confinement of nano-particles (the bulk bandgap of Cu_xS lies in the range 700-1000 nm depending on its stoichiometry and crystal structure). This is dispersion 2.

Mixing nano-particle dispersions of ZnS_x and CuS_x

20

Coating dispersion A:

35.1 mL of dispersion 1 (0.382M) was mixed with 3.9 mL of dispersion 2 (0.393M) and to this 1 mL of a 1% solution in water of
25 ZONYL FSN 100 (Dupont) was added to produce coating dispersion A with 90 mole % ZnS_x and 10 mole % CuS_x.

Coating dispersion B:

30 31.2 mL of dispersion 1 (0.382M) was mixed with 7.8 mL of dispersion 2 (0.393M) and to this 1 mL of a 1% solution in water of ZONYL FSN 100 (Dupont) was added to produce coating dispersion B with 80 mole % ZnS_x and 20 mole % CuS_x.

Preparation of dispersions of Zn(99at%)Cu(1at%) metal sulphide nano-particles (= EXAMPLE 1.1 of EP-A 1 231 250)

The following solutions were prepared:

5

Solution 6:	ZnCl ₂ .2H ₂ O deionized water	81.76 g (0.60 moles) made up to 600 mL
Solution 7:	Na ₂ S.9H ₂ O NaOH (50%) deionized water	141.6 g (0.60 moles) 3.6 mL made up to 600 mL
Solution 8:	CuCl ₂ deionized water	0.85 g (0.0063 moles) made up to 800 mL

Dispersion 3:

The Zn(99at%)Cu(1at%) metal sulphide nano-particle dispersion
 10 1% substoichiometric in sulphur was prepared as follows: 0.5 mL of
 solution 7 was first added to solution 8 maintained at 25°C and
 stirred at 1500 rpm and then solutions 6 and 7 were added
 simultaneously at 25°C and at a flow rate of 500 mL/min. To 1000
 mL of the resulting dispersion, 1000 mL of a 2% sodium
 15 polyphosphate solution was added to stabilize the nano-particle
 dispersion and this dispersion concentrated to 1000 mL by means of
 a Fresenius F60 cartridge. This dispersion was then diafiltered
 using 6000 mL of a 2% solution of sodium polyphosphate in deionized
 water. The dispersion was further concentrated to a concentration
 20 of about 35 g ZnS/L (0.36M). This is dispersion 3.

Coating dispersion C:

1 mL of a 12.5% solution in water/ethanol (80/20) of Saponine
 25 Quillaya (Schmittmann) was added per 20 mL of dispersion 3 to
 prepare coating dispersion C.

Preparation of dispersions of Zn(92at%)Cu(8at%) metal sulphide nano-particles

30

The following solutions were prepared:

Solution 9:	Zn(CH ₃ COO) ₂ ·2H ₂ O Cu(CH ₃ COO) ₂ ·H ₂ O deionized water	148.16 g (0.675 moles) 10.9 g (0.060 moles) made up to 600 mL
Solution 10:	Na ₂ S·9H ₂ O NaOH (50%) deionized water	168.3 g (0.685 moles) 4.3 mL made up to 600 mL
Solution 11:	NaCl deionized water	58.44 g made up to 1000 mL

Dispersion 4:

The Zn(91.8at%)Cu(8.2at%) metal sulphide nano-particle dispersion substoichiometric in sulphur was prepared as follows: 0.5 mL of solution 9 was added to solution 11 maintained at 25°C and stirred at 1500 rpm and then solutions 9 and 10 were added simultaneously at 25°C and at a flow rate of 500 mL/min. To 1000 mL of the resulting dispersion, 1000 mL of a 2% polyphosphoric acid solution was added to stabilize the nano-particle dispersion and the dispersion concentrated to 1000 mL by means of a Fresenius F60 cartridge. This dispersion was then diafiltered using 6000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was further concentrated to a volume of about 570 mL (0.36M) to produce dispersion 4. On average 20 to 30% by weight of the dispersion is lost during the washing and concentration processes through ion exchange, loss of small particles in the pores of the Fresenius cartridge etc.

Coating dispersion D:

0.5 mL of a 1% solution in water of ZONYL™ FSN 100 (Dupont) was added to 19.5 mL of dispersion 4 to prepare coating dispersion D.

Preparation of dispersions of Zn(83at%)Cu(17at%) metal sulphide nano-particles

The following solutions were prepared:

Solution 12:	Zn(CH ₃ COO) ₂ ·2H ₂ O Cu(CH ₃ COO) ₂ ·H ₂ O deionized water	131.7 g (0.600 moles) 21.8 g (0.120 moles) made up to 600 mL
--------------	--	--

Dispersion 5:

The Zn(83.3at%)Cu(16.7at%) metal sulphide nano-particle dispersion substoichiometric in sulphur was prepared as follows:
 5 0.5 mL of solution 12 was added to solution 11 maintained at 25°C and stirred at 1500 rpm and then solutions 10 and 12 were added simultaneously at 25°C and at a flow rate of 500 mL/min. To 1000 mL of the resulting dispersion, 1000 mL of a 2% polyphosphoric acid solution was added and the dispersion concentrated to 1000 mL using
 10 a Fresenius F60 cartridge. This dispersion was then diafiltered using 6000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was further concentrated to a volume of about 570 mL (0.36M) to produce dispersion 5.

15 Coating dispersion E:

0.5 mL of a 1% solution in water of ZONYL™ FSN 100 (Dupont) was added to 19.5 mL of dispersion 5 (0.36M) to prepare coating dispersion E.

20

Coating dispersion F:

1.35 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 0.5 mL of a 1% solution of ZONYL™ FSN 100
 25 (Dupont) in water were added to 18.15 mL of dispersion 5 (0.36M) to prepare coating dispersion F with a weight ratio of binder to metal sulphide particles of 1:10.

Preparation of a dispersion of Ag₂S nano-particles

30

The following solutions were prepared:

Solution 13:	Polyvinylpyrrolidone (27% in H ₂ O) AgNO ₃ (5.8 M in water) deionized water	20 g 12.93 mL (0.0750moles) made up to 600 mL
Solution 14:	Na ₂ S ₂ O ₃ .5H ₂ O deionized water	9.5 g (0.0383 moles) made up to 600 mL
Solution 15:	Tl NaOH deionized water	15.0 g 1.5 g made up to 650 mL

Dispersion 6:

The Ag₂S nano-dispersion 2.1% superstoichiometric in sulphur was prepared as follows: to solution 15, held at 4°C and stirred at 1500 rpm, solutions 13 and 14 were added simultaneously both at 4°C at a flow rate of 500 mL/min. This is dispersion 6 which contained approximately 5 g/L (0.00403M) Ag₂S nano-particles.

Mixing of nano-particle dispersions of Zn(83at%)Cu(17at%) metal sulphide and silver sulphide

Coating dispersion G:

20 mL of dispersion 6 (0.00403M) was mixed with 10 mL of dispersion F to produce coating dispersion G containing approximately 98 mol% Zn(83at%)Cu(17at%) metal sulphide nano-particles and 2 mol% Ag₂S nano-particles.

Preparation of a dispersion of ZnCuAg metal sulphide nano-particles by converting Zn(83at%)Cu(17at%) metal sulphide nano-particles with 0.004 moles of Ag⁺-ions

The following solution was prepared:

Solution 16	AgNO ₃ (5,8 M in water)	0.69 mL (0.0040 moles)
	Triammonium citrate	12.36 g
	deionized water	made up to 18.34 mL

Dispersion 7:

200 mL of dispersion 5 [Zn(83.3at%)Cu(16.7at%)S] was mixed with 18.34 mL of solution 16 (0.004 moles Ag⁺) with stirring. To 200 mL of this mixture, 200 mL of a 2% polyphosphoric acid solution was added and the dispersion concentrated to 200 mL by means of a Fresenius F60 cartridge. This dispersion was then diafiltered using 1000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was then further concentrated to a volume of about 200 mL (0.36M) of ZnCuAg metal sulphide nano-particles. In the absence of analysis the composition of the metal component of the resulting ZnCuAg metal sulphide nano-particles is unknown, but it is reasonable to assume in view of zinc ions having the highest

solubility product that it is zinc ions, which were for the most part displaced by silver ions.

Coating dispersion H:

5

33.2 mL of dispersion 7 was ultrasonically treated for 6 minutes of ultrasound treatment, followed by the addition of 2.5 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 1 mL of a 1% solution of ZONYL™ FSN 100 (Dupont) in water
10 to produce coating dispersion H.

Preparation of a dispersion of Zn(75at%)Cu(20at%)Ag(5at%) metal sulphide nano-particles by precipitation

15

The following solutions were prepared:

Solution 17:	Zn(NO ₃) ₂ ·6H ₂ O Cu(NO ₃) ₂ ·3H ₂ O AgNO ₃ (5.8 M in water) deionized water	134 g (0.450 moles) 29 g (0.120 moles) 5.17 mL (0.0300 moles) made up to 600 mL
Solution 18:	Na ₂ S·9H ₂ O deionized water	112.2 g (0.457 moles) made up to 600 mL
Solution 19:	Tl NaOH deionized water	20.0 g 2 g made up to 1000 mL

Dispersion 8:

20

The Zn(75at%)Cu(20at%)Ag(5at%) metal sulphide nano-particle dispersion 24% substoichiometric in sulphur was prepared as follows: solutions 17 and 18 were added simultaneously at 25°C and at a flow rate of 500 mL/min to solution 19 maintained at 25°C and stirred at 1500 rpm. To 1000 mL of the resulting dispersion, 1000
25 mL of a 2% polyphosphoric acid solution was added and the dispersion concentrated to 1000 mL using a Fresenius F60 cartridge. This dispersion was then diafiltered using 6000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was then further concentrated to a volume of about 570 mL.

30

Coating dispersion I:

1.35 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 0.5 mL of a 1% solution of ZONYL™ FSN 100 (Dupont) in water was added to 18,15 mL of dispersion 8 to produce coating dispersion I with a weight ratio of binder to metal sulphide particles of 1:10.

Coating dispersion J:

10

6.75 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 0.5 mL of a 1% solution of ZONYL™ FSN 100 (Dupont) in water was added to 12.75 mL of dispersion 8 to produce coating dispersion J with a weight ratio of binder to metal sulphide particles of 1:2.

Preparation of a dispersion of Zn(65at%)Cu(20at%)Ag(5at%) metal sulphide nano-particles by precipitation

20 The following solution was prepared:

Solution 20:	Zn(NO ₃) ₂ ·6H ₂ O	116.1 g (0.390 moles)
	Cu(NO ₃) ₂ ·3H ₂ O	29 g (0.120 moles)
	AgNO ₃ (5.8 M in water)	15.5 mL (0.090 moles)
	deionized water	made up to 600 mL

Dispersion 9:

25 The Zn(65at%)Cu(20at%)Ag(5at%) metal sulphide nano-particle dispersion 24% substoichiometric in sulphur was prepared as follows: solutions 20 and 18 were added simultaneously at 25°C and at a flow rate of 500 mL/min to solution 19 maintained at 25°C and stirred at 1500 rpm. To 1000 mL of the resulting dispersion, 1000 mL of a 2% polyphosphoric acid solution was added and the dispersion concentrated to 1000 mL by means of a Fresenius F60 cartridge. This dispersion was then diafiltered by using 6000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was then further concentrated to a volume of about 570 mL.

35

Coating dispersion K:

1.35 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 0.5 mL of a 1% solution of ZONYL™ FSN 100 (Dupont) in water was added to 18.15 mL of dispersion 9 to produce coating dispersion K with a weight ratio of binder/metal sulphide particles of 1:10.

Preparation of a dispersion of Zn(45at%)Cu(40at%)Ag(15at%) metal sulphide nano-particles by precipitation

The following solution was prepared:

Solution 21:	Zn(NO ₃) ₂ ·6H ₂ O	80.4 g (0.270 moles)
	Cu(NO ₃) ₂ ·3H ₂ O	58 g (0.240 moles)
	AgNO ₃ (5.8 M in water)	15.5 mL (0.090 moles)
	deionized water	made up to 600 mL

Dispersion 10:

The Zn(45at%)Cu(40at%)Ag(15at%) metal sulphide nano-particle dispersion 24% substoichiometric in sulphur was prepared as follows: solutions 21 and 18 were added simultaneously at 25°C and at a flow rate of 500 mL/min to solution 19 maintained at 25°C and stirred at 1500 rpm. To 1000 mL of the resulting dispersion, 1000 mL of a 2% polyphosphoric acid solution was added and the dispersion concentrated to 1000 mL by means of a Fresenius F60 cartridge. This dispersion was then diafiltered using 6000 mL of a 2% solution of polyphosphoric acid in water. The dispersion was then further concentrated to a volume of about 570 mL.

Coating dispersion L:

1.35 mL of a 5 % solution of polyvinylpyrrolidone (LUVISKOL K-90; BASF) in water and 0.5 mL of a 1% solution of ZONYL™ FSN 100 (Dupont) in water was added to 18.15 mL of dispersion 10 to produce coating dispersion L with a weight ratio of binder/metal sulphide particles of 1:10.

Photovoltaic devices

Photovoltaic devices was built up on an ITO layer on a PET substrate (IST-ISF) ($5 \times 5 \text{ cm}^2$) with a surface conductivity of about 80 Ohm/Sq, which was patterned using HNO_3 . Two borders of about 1.5 cm were treated with HNO_3 in order to destroy the conductivity to produce a conductive area in the middle of the material with dimensions 5 cm x 2 cm. Coating dispersions A, B and D to L were filtered through a 5 μm MILLIPORE® filter and put on a roller machine for 1h. 20 mL of each dispersion was then ultrasonically treated with a ultrasound bar (Vibra cell VCX 400 W from Sonics & Materials Inc. - amplitude about 78% - output 40%) for 3 minutes leaving the dispersion in ice so it did not become hot. The resulting dispersions were then spincoated on these substrates twice at 1000 rpm to yield a nano-particle layer thickness of about 100 nm.

Spectrophotometric measurements were carried out on the ca. 100 nm thick layers prepared with coating dispersions F, G, H, I, J, K and L. The absorption spectra obtained are shown in Figure 1. The maximum transmission increased from about 57% for coating dispersion L to 84% for coating dispersion F and increased in the order $F < G < I = J = K < L$. The absorption spectra for 100 nm thick layers prepared with coating dispersions F, G, H, I, J, K and L are shown in Figure 1. The high absorption with the layer prepared with coating dispersion H resulted from opacity, which was due to a very high haze probably due to larger agglomerates. Only in the cases of the transparent layers prepared with coating dispersions J, K and L was a pronounced variation in absorption with wavelength observed.

Finally 160 nm thick aluminum electrode (cathode) layers were vacuum deposited on the spincoated layers at 10^{-6} Torr via a mask. The active area was 25 mm^2 .

Device evaluation

The thereby prepared photovoltaic cells were irradiated with a Xenon Arc Discharge lamp with a power of 75 mW/cm^2 . The current generated was recorded with a Keithley electrometer (Type 2420). The open circuit voltage (V_{oc}) (i.e. voltage by zero current) and short circuit current density (I_{sc}) (i.e. current by zero voltage) obtained are given in Table 1.

Table 1:

Dispersion	Composition	sulphur deficit (at%)	PVP**	I_{sc} ($\mu A/cm^2$)	V_{oc} (V)
A(comp.)	mixture of 90 mol% ZnS & 10 mol% Cu_xS	*/4.5	No	1.4	0.020
B(comp.)	mixture of 80 mol% ZnS & 20 mol% Cu_xS	*/4.5	No	1.3	0.040
C(comp.)	Zn(99at%)Cu(1at%) metal sulphide via coprecipitation	1.0	No	0.04	0.070
D(inv.)	Zn(92at%)Cu(8at%) metal sulphide via coprecipitation	6.8	No	2.6	0.275
E(inv.)	Zn(83at%)Cu(17at%) metal sulphide via coprecipitation	4.9	No	4.6	0.100
F(inv.)	Zn(83at%)Cu(17at%) metal sulphide via coprecipitation with binder(PVP)	4.9	10%	4.0	0.400
G(inv.)	mixture of coprecipitated Zn(83at%)Cu(17at%) metal sulphide, PVP and Ag_2S (mol. ratio 98:2)	4.9	10%	9.6	0.400
H(inv.)	Zn(83at%)Cu(17at%) metal sulphide modified by Ag^+ conversion	4.9	10%	7.6	0.380
I(inv.)	Zn(75at%)Cu(20at%)Ag(5at%) metal sulphide via coprecipitation	24	10%	16.0	0.700
J(inv.)	Zn(75at%)Cu(20at%)Ag(5at%) metal sulphide via coprecipitation	24	50%	2.8	0.200
K(inv.)	Zn(65at%)Cu(20at%)Ag(15at%) metal sulphide via coprecipitation	24	10%	10.0	0.600
L(inv.)	Zn(45at%)Cu(40at%)Ag(15at%) metal sulphide via coprecipitation	24	10%	30.0	0.950

* 20% substoichiometric in zinc

** PVP = polyvinylpyrrolidone, amount in weight percentage versus metal sulphide

The results in Table 1 show that no significant photovoltaic response was obtainable at a p-type semiconductor concentration of 1 atomic % of the metal. Such materials exhibited
 10 electroluminescence as disclosed in EP-A 1 231 250, which at such low concentrations quenched any photovoltaic effects. However, at concentrations of p-type semiconductors above 5 atomic % of the metal photovoltaic effects were surprisingly observed.

The results in Table 1 further show that incorporation of low bandgap Ag_2S improved the photovoltaic response as well as increasing the light absorption, which was evident from the brownish coloration of the photovoltaic layers containing Ag_2S .

5 Therefore, Ag_2S acts as a spectral sensitizer.

These results further show that although spectral sensitization with Ag_2S could be realized by simple mixing with the metal chalcogenide composite nano-particles of the present invention or by incorporation in the metal chalcogenide composite nano-particles by conversion or coprecipitation, coprecipitation
10 produced the best photovoltaic properties.

Variation in chalcogenide deficit between 4.9% and 24% had no dramatic effect on the photovoltaic effect observed as can be seen by comparing the short circuit currents obtained with photovoltaic
15 devices incorporating a layer coated with Dispersion G with that incorporating a layer coated with Dispersion I.

Adding a binder to the dispersion improved the layer quality and the photovoltaic properties up to a weight ratio of 10% binder to metal chalcogenide composite nano-particles. Too much binder,
20 e.g. a weight ratio of 50% binder to metal chalcogenide composite nano-particles (Dispersion J) had an adverse effect on the photovoltaic properties.

Photovoltaic devices incorporating a layer coated with Dispersion L exhibited the highest photocurrent, which was probably
25 due to the fact that the n-type (ZnS) and p-type (Cu_xS) semi-conducting material was present in similar concentrations.

The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any
30 generalisation thereof irrespective of whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

CLAIMS

1. A metal chalcogenide composite nano-particle comprising a metal capable of forming p-type semiconducting chalcogenide nano-particles and a metal capable of forming n-type semiconducting chalcogenide nano-particles, wherein at least one of said metal chalcogenides has a band-gap between 1.0 and 2.9 eV and the concentration of said metal capable of forming p-type semiconducting chalcogenide nano-particles is at least 5 atomic percent of said metal and is less than 50 atomic percent of said metal.
2. A metal chalcogenide composite nano-particle according to claim 1, wherein said metal chalcogenide composite nano-particle comprises a p-type semiconducting metal chalcogenide phase and a n-type semiconducting chalcogenide phase, at least one of said metal chalcogenides has a band-gap between 1.0 and 2.9 eV and the concentration of said p-type semiconducting metal chalcogenide in said metal chalcogenide composite nano-particle is at least 5 mole percent and is less than 50 mole percent.
3. Metal chalcogenide composite nano-particle according to claim 1, wherein said metal chalcogenide composite particle is a coprecipitated particle.
4. Metal chalcogenide composite nano-particle according to claim 1, wherein said metal chalcogenide composite particle is a metal sulphide composite particle.
5. Metal chalcogenide composite nano-particle according to claim 1, wherein said metal capable of forming n-type semiconducting chalcogenide nano-particles is selected from the group consisting of zinc, bismuth, cadmium, mercury, indium, tin, tantalum and titanium.
6. Metal chalcogenide composite nano-particle according to claim 1, wherein said metal capable of forming p-type semiconducting chalcogenide nano-particles is selected from the group consisting of copper, chromium, iron, lead and nickel.
7. Metal chalcogenide composite nano-particle according to claim 1, wherein said metal chalcogenide composite particle further

contains a metal capable of forming spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV.

- 5 8. Metal chalcogenide composite nano-particle according to claim 7, wherein said metal capable of forming spectrally sensitizing chalcogenide nano-particles is selected from the group consisting of silver, lead, copper, bismuth, vanadium and cadmium.
- 10 9. Metal chalcogenide composite nano-particle according to claim 1, wherein a stoichiometric deficit of the chalcogenide in said metal chalcogenide composite nano-particle is present.
- 15 10. A dispersion comprising a metal chalcogenide composite nano-particle according to claim 1.
11. A process for preparing a dispersion according to claim 10 comprising the steps of preparing a composite metal
20 chalcogenide nano-particle containing an n-type semiconducting chalcogenide and a p-type semiconducting p-type semiconducting chalcogenide, wherein at least one of said metal chalcogenides has a band-gap between 1.0 and 2.9 eV.
- 25 12. Process according to claim 11, wherein said process further includes a coprecipitation step, a metal ion conversion step and/or a sintering step.
13. Process according to claim 11, wherein said coprecipitation is
30 carried out in a medium containing at least one compound selected from the group consisting of thiols, triazole compounds and diazole compounds.
14. Process according to claim 11, wherein said process includes
35 the step of mixing said metal chalcogenide composite nano-particles with spectrally sensitizing chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV.
15. Process according to claim 11, wherein said process comprises
40 the step of converting said metal chalcogenide composite nano-particles with metal ions.

16. Process according to claim 11, wherein said process further includes a diafiltration process.
17. Process according to claim 16, wherein the washing medium in
5 said diafiltration process contains a phosphoric acid or a phosphoric acid salt.
18. A layer comprising metal chalcogenide composite nano-particles according to claim 1.
- 10 19. Layer according to claim 18, wherein said layer further contains at least one spectral sensitizer for said metal chalcogenide composite nano-particles.
- 15 20. Layer according to claim 19, wherein said at least one spectral sensitizer is selected from the group consisting of metal chalcogenide nano-particles with a band-gap between 1.0 and 2.9 eV, organic dyes, and metallo-organic dyes.
- 20 21. Layer according to claim 18, wherein said layer further contains a binder.
22. Layer according to claim 21, wherein said binder is poly(vinyl pyrrolidone).
- 25 23. A photovoltaic device comprising a layer according to claim 13.
24. Use of a metal chalcogenide composite nano-particle according to claim 1 in a photovoltaic device.

ABSTRACT

METAL CHALCOGENIDE COMPOSITE NANO-PARTICLES AND LAYERS THEREWITH

5 A metal chalcogenide composite nano-particle comprising a metal
capable of forming p-type semiconducting chalcogenide nano-
particles and a metal capable of forming n-type semiconducting
chalcogenide nano-particles, wherein at least one of the metal
chalcogenides has a band-gap between 1.0 and 2.9 eV and the
10 concentration of the metal capable of forming p-type semiconducting
chalcogenide nano-particles is at least 5 atomic percent of the
metal and is less than 50 atomic percent of the metal; a dispersion
thereof; a layer comprising the nano-particles; and a photovoltaic
device comprising the layer.

1/1

Figure 1:

